

SPREAD CYLINDERS

CY

0,8-1 Tn.

700 bar

TOOLS


SPREAD CYLINDERS




LARZEP advantages

- CY series spreaders are used for many tasks in confined access situations.
- CY0109G is used for very confined situations and CY00822G is used for greater spreading distance.
- CY0109G and CY00822G models are supplied with AZ3140 high flow female couplers.
- Also available CY0109 and CY00822 fitted with AZ3240 low flow female coupler.

CY0109G

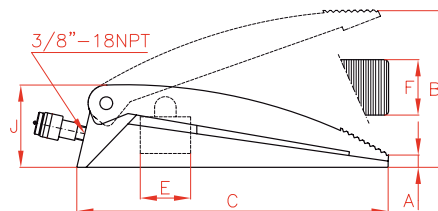

CY00822G

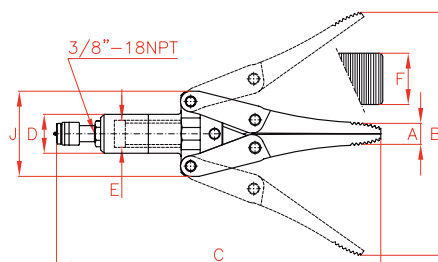

Capacity		Stroke	Model	Oil Cap.	Area	A	B	C	D	E	F	J	Weight
Tn	kN	mm	LARZEP	cm ³	cm ²	mm	mm	mm	mm	mm	mm	mm	kg
1	10	75	CY0109G	10	7	15	90	225	-	29	55	55	2
0,8	8	189	CY00822G	63	15	31	220	443	58	43	50	124	7