

• FORCE	5 - 10 t
• STROKE	50 mm
• MAX WORKING PRESSURE	700 bar

UA FLANGE SPREADER



FEATURES

The **UA Europress** flange spreader is completely Nitreg treated (except the aluminium parts) for a superior strength and resistance to corrosion.

It's equipped with a standard **CMI Europress** cylinder, easy to use, safe and lightweight. It's available in the version of 5 and 10 ton, with a working pressure of 700 bar.


The flanges can be regulated to reach an opening from 48 to 223 mm. It's supplied equipped with the coupler.

OPERATIONAL AREAS

They are mostly used in the petrol chemistry industry, industrial and shipyards maintenance.



For the best use of UA Flange Spreader we recommend our hand pumps model **PS100** or **PNP130**.

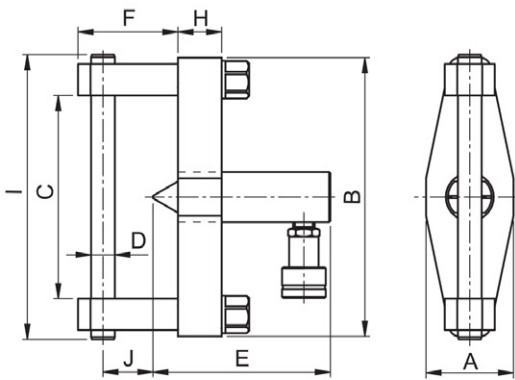

HYDRAULIC TOOLS

SELECTION CHART

PUSHING FORCE	FLANGE OPENING	STROKE	OIL VOLUME	MODEL	DIMENSIONS MM										WEIGHT
					A	B	C	D	E	F	H	I	J	kg	
t	mm	mm	cm ³		A	B	C	D	E	F	H	I	J	kg	
5	3 - 25	50	35	UA5	70	220	48 - 161	19	143	80	35	227	40	4	
10	4 - 35	50	80	UA10	100	300	64 - 223	32	153	90	50	315	50	9,5	