

# AP - DOUBLE PUMP


## TWO SPEED AIR PUMP WITH MANUAL VALVE

**Abdex**  
HYDRAULICS



### Main Technical Features


- Available in Single Acting, Double Acting or with Remote Control.
- Maximum operating pressure up to 700 bar.
- Approximate flow rate at rated pressure.  
1st stage: 8.5 l/min.  
2nd stage: 0.26 l/min.
- 8 L steel tank.
- Pneumatic supply 4 - 10 bar.
- No lubricated air.
- Noise level 85 dbA.
- Size mm 356x297x365.
- Weight 23.7 Kg.
- Built for heavy duty.
- Internal pressure relief valve.
- Air connection: G 3/8".
- Oil connection: 3/8"-18 NPTF.
- Air consumption: 780 l/min.

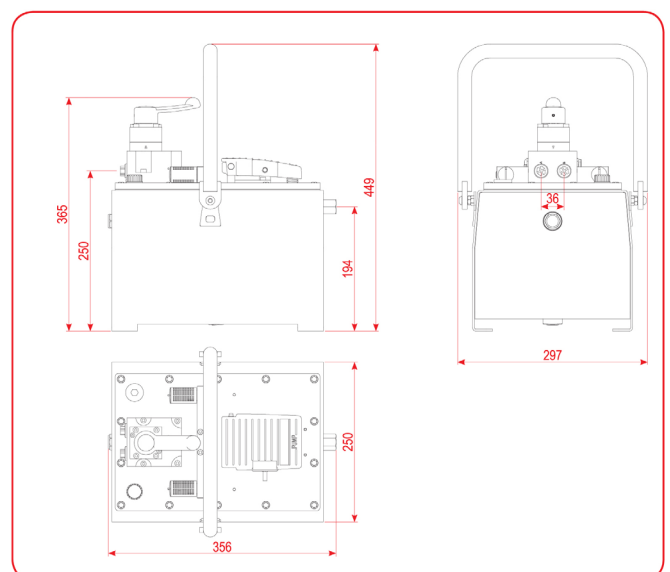


# AP - DOUBLE PUMP TWO SPEED AIR PUMP WITH MANUAL VALVE

**Abdex**  
HYDRAULICS

**Air Consumption  
Diagram**

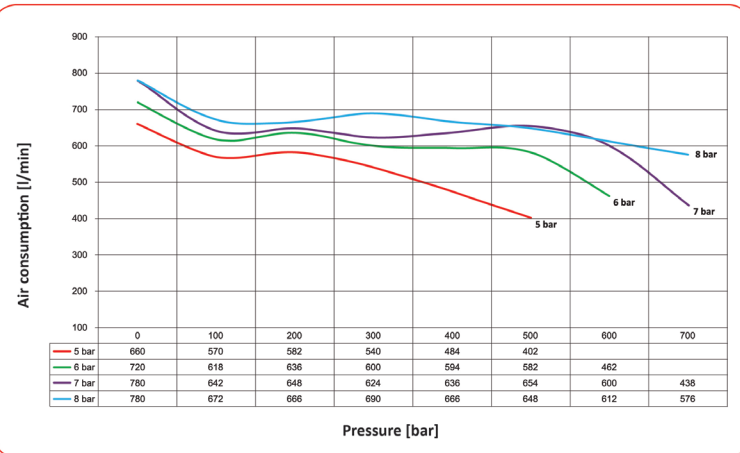

**Oil Flow / Pressure  
Diagram**

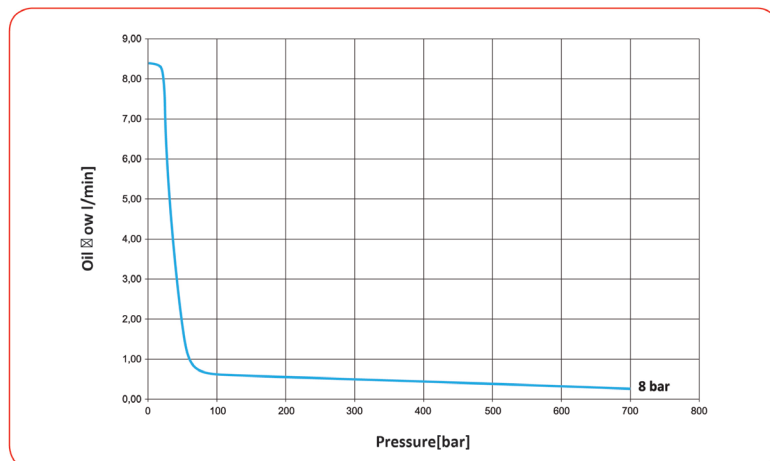

**Available in three models**

## **APSF28**

Two speed, pedal control, single acting

## **APDF28**

Two speed, manual valve, double acting

## **APSR28**

Two speed, remote control, single acting