



Abdex
HYDRAULICS



Victoria

A: 27 Metcalf Street, Dandenong South, Victoria, 3175

P: (03) 9796 3744

Western Australia

A: 260 Allen Road Forrestdale, Western Australia, 6112

P: (08) 9418 4988

Queensland

A: 12 Machinery Street, Darra, Queensland, 4076

P: (03) 9796 3744

New South Wales

A: Unit D, 26 Penny Place, Arndell Park, New South Wales, 2148

P: (03) 9796 3744



E: sales@abdexhydraulics.com.au

M60-22

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M60-22



Capacity: 60/30 t 66.1 / 33.1 ton

Net Weight: 93kg / 205 lb

Working Air Pressure: 10-12 bar / 145 - 174 psi

Air Consumption: 600 nl/min

Min. Height: 222 mm / 8.7 in


Max. Height: 448 mm / 17.6 in

Number of Pistons: 2

Stroke: 226 mm / 8.8 in

- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control available for extra safety.
- Folding handle.
- Wide range of models and capacities from 60t to 150t.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.

Accessories




M4096

Remote Control



M4933

Extension Holder
Right



M4934

Extension Holder
Left



M4937

Extension
150 mm




M4938

Extension
250 mm



M4939

Extension
300 mm



A04492

Tilt Saddle



A08230

Tilt Extension
150 mm




A08232

Tilt Extension
250 mm



A08234

Tilt Extension
300 mm

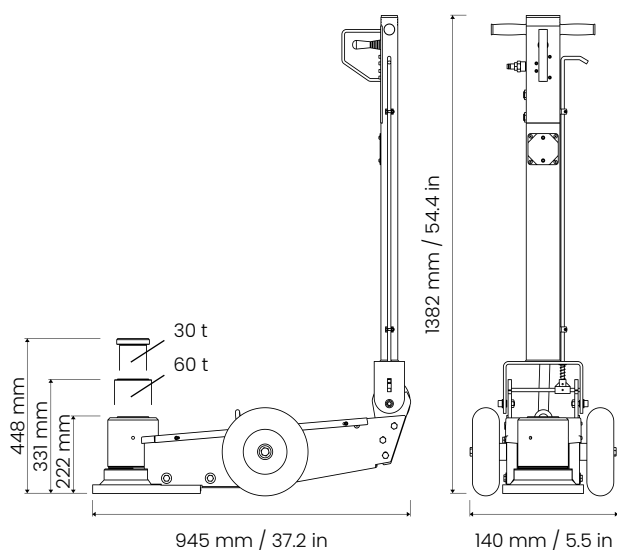

sales@abdexhydraulics.com.au



www.mammut.com.au

M80-31-S2

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M80-31-S2



Capacity: 80/50/25 t 88.2/55.1/27.6 ton

Net Weight: 163 kg / 359 lb

Working Air Pressure: 10-12 bar / 145 - 174 psi

Air Consumption: 600 nl/min

Min. Height: 342 mm / 13.5 in

Max. Height: 848 mm / 33.4 in

Number of Pistons: 3

Pistons Stroke: 506 mm / 19.9 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control available for extra safety.
- Folding handle.
- Wide range of models and capacities from 60t to 150t.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks are available for mechanical lock and to turn jack into a jack stand.

Accessories



M4933

Extension
Holder Right



M4934

Extension
Holder Left



M4937

Extension
150 mm



M4938

Extension
250 mm




M4939

Extension
300 mm



LBS80

Load block Set
3x M4905, 1x M4906,
1x M4907, 1x M4923



A04492

Tilt Saddle



A08230

Tilt Extension
150 mm




A08232

Tilt Extension
250 mm



A08234

Tilt Extension
300 mm

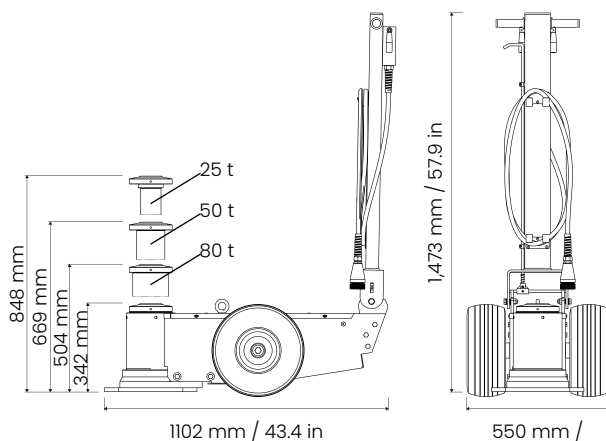

sales@abdexhydraulics.com.au



www.mammut.com.au

M80-42-S2

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M80-42-S2



Capacity: 80/50 t / 88.2/55.1 ton

Net Weight: 173 kg / 381 lb

Working Air Pressure: 10-12 bar / 145 - 174 psi

Air Consumption: 600 nl/min

Min. Height: 419 mm / 16.4 in

Max. Height: 839 mm / 33 in

Number of Pistons: 2

Pistons Stroke: 420 mm / 16.5 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Now with new, faster motor.
- Integrated remote control for extra safety.
- Wide range of models and capacities from 60t to 150t.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks available for mechanical lock and to turn jack into a jack stand

Accessories



M4933

Extension Holder Right



M4934

Extension Holder Left



M4937

Extension 150 mm



M4938

Extension 250 mm




M4939

Extension 300 mm



LBS80

Load block Set
3x M4905, 1x M4906,
1x M4907, 1x M4923



A04492

Tilt Saddle



A08230

Extension 150 mm




A08232

Tilt Extension 250 mm



A08234

Tilt Extension 300 mm

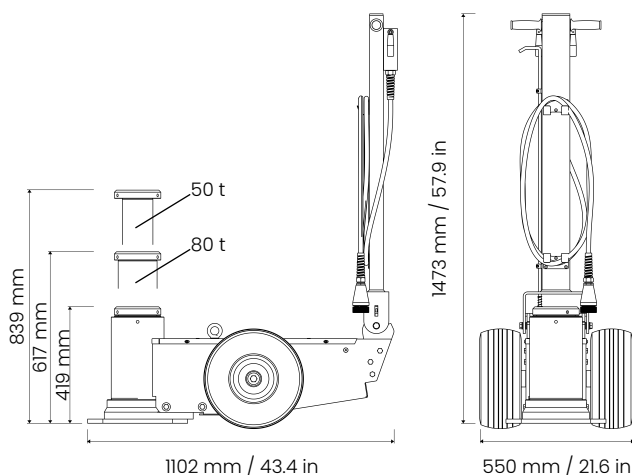

sales@abdexhydraulics.com.au



www.mammut.com.au

M100-40-S2

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M100-40-S2



Capacity:	100 t / 110.2 ton
Net Weight:	168 kg / 370 lb
Working Air Pressure:	10-12 bar / 145 - 174 psi
Air Consumption:	600 nl/min
Min. Height:	399 mm / 15.7 in
Max. Height	602 mm / 23.7 in
Number of Pistons	1
Pistons Stroke:	203 mm / 8 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Now with new, faster motor.
- Integrated remote control for extra safety.
- Wide range of models and capacities from 60t to 150t.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks available for mechanical lock and to turn jack into a jack stand

Accessories



M4933

Extension Holder
Right



M4934

Extension Holder
Left



M4937

Extension
150 mm



M4938

Extension
250 mm




M4939

Extension
300 mm



LBS100-40

Load block Set



A04492

Tilt Saddle



A08230

Tilt Extension
150 mm




A08232

Tilt Extension
250 mm



A08234

Tilt Extension
300 mm

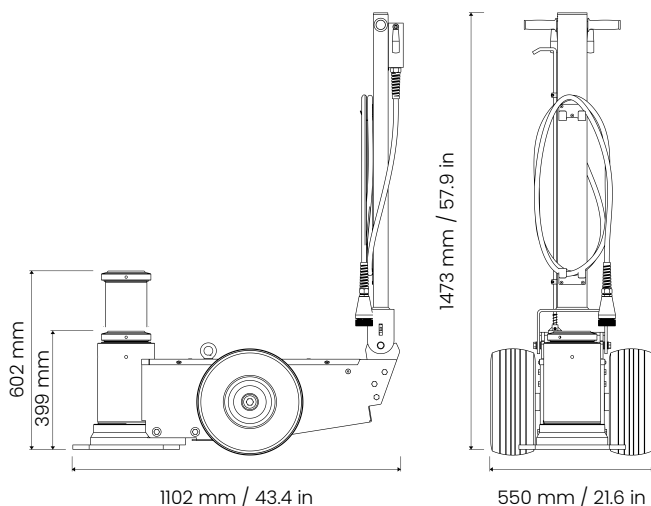

sales@abdexhydraulics.com.au



www.mammut.com.au

M100-72-S2

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M100-72-S2



Capacity:	100 t / 110.2 ton
Net Weight:	284kg / 626 lb
Working Air Pressure:	10-12 bar / 145 - 174 psi
Air Consumption:	600 nl/min
Min. Height:	725 mm / 28.5 in
Max. Height:	1170 mm / 46 in
Number of Pistons:	1
Pistons Stroke:	445 mm / 17.5 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control available for extra safety.
- Folding handle.
- Wide range of models and capacities from 60t to 150t.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks are available for mechanical lock and to turn jack into a jack stand

Accessories



M4935

Extension Holder
Right



M4936

Extension Holder
Left



M4930

Extension
200 mm



M4931

Extension
250 mm




M4932

Extension
300 mm




LBS100

Load block Set
3x M4905, 1xM4906,
1xM4907, 1xM4923



A04495

Tilt Saddle

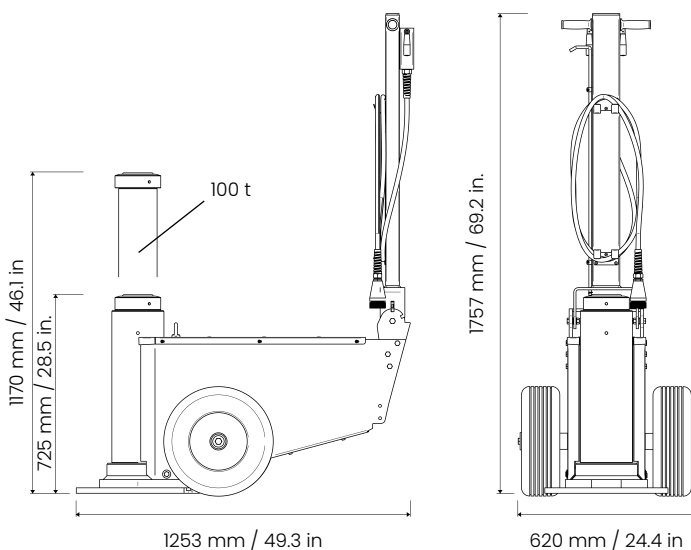

sales@abdexhydraulics.com.au



www.mammut.com.au

M100-72-ATLAS

The Mammut ATLAS series makes it possible to work safely under the lifted vehicle, without the use of jack stands or support blocks.

M100-72-ATLAS



Capacity:	100 t / 110.2 ton
Net Weight:	427 kg / 941 lb
Working Air Pressure:	10-12 bar / 145 - 174 psi
Air Consumption:	600 nl/min
Min. Height:	722 mm / 28.4 in
Max. Height	1062 mm / 46.9 in
Number of Pistons	1
Pistons Stroke:	340 mm / 13.3 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Two in one jack that can also mechanically lock and turn into a jack stand.
- Mechanical safety lock sealed inside the cylinder unit to protect it from dirt and dust.
- Remote control that operates lift and lock.
- "Safe Load" LED indicators.
- Folding handle.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.

Accessories



M4935

Extension Holder Right



M4936

Extension Holder Left



M4930

Extension 200 mm




M4931

Extension 250 mm





M4932

Extension 300 mm



A04495

Tilt Saddle

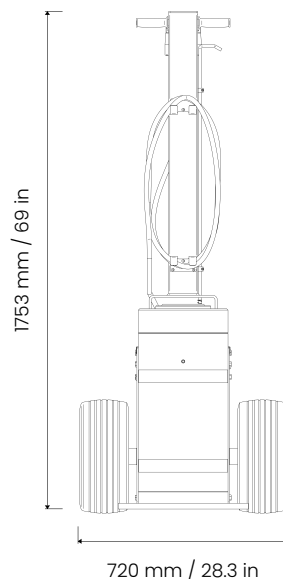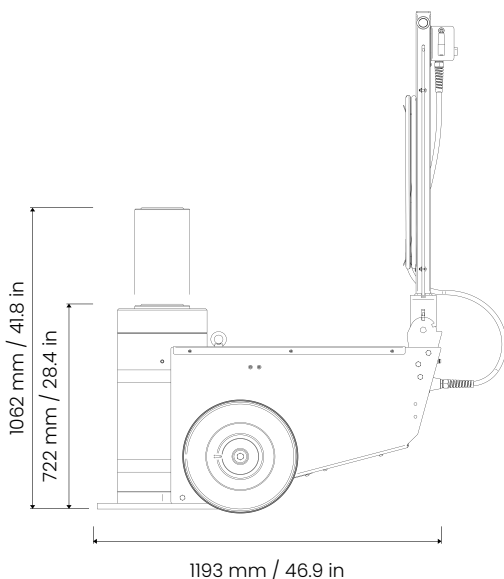

sales@abdexhydraulics.com.au



www.mammut.com.au

M100-90

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M100-90



Capacity:	100 t / 110.2 ton
Net Weight:	377 kg / 831 lb
Working Air Pressure:	10-12 bar / 145 - 174 psi
Air Consumption:	600 nl/min
Min. Height:	900 mm / 35.4 in
Max. Height:	1466 mm / 57.7 in
Number of Pistons:	1
Pistons Stroke:	566 mm / 22.2 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control as standard for extra safety.
- Folding handle.
- Wide range of models and capacities from 60 to 200 t.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load block available for mechanical lock and turn jack into jack stand.

Accessories



M4936

Extension Holder
Left



M4935

Extension Holder
Right



M4930

Extension
200 mm




M4931

Extension
250 mm



M4932

Extension
300 mm




A04495

Tilt Saddle



LBS100-90

Safety Blocks Kit

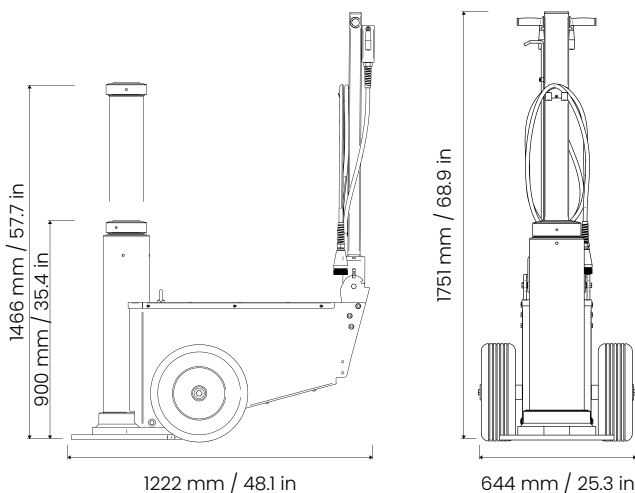

sales@abdexhydraulics.com.au



www.mammut.com.au

M150-72

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M150-72



Capacity: 150 t / 165.3 ton

Net Weight: 367 kg / 809 lb

Working Air Pressure: 10-12 bar / 145 - 174 psi

Air Consumption: 600 nl/min

Min. Height: 720 mm / 28.3 in

Max. Height: 1092 mm / 42.9 in

Number of Pistons: 1

Pistons Stroke: 372 mm / 14.6 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control as standard for extra safety.
- Folding handle.
- Wide range of models and capacities from 60 t to 200 L
- Designed for tough Australian conditions
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks are available for mechanical lock and to turn jack into a jack stand.

Accessories



M4936

Extension Holder
Left



M4935

Extension Holder
Right



M4930

Extension
200 mm




M4931

Extension
250 mm




M4932

Extension
300 mm




A04495

Tilt Saddle



LBS150-72

Safety Blocks Kit

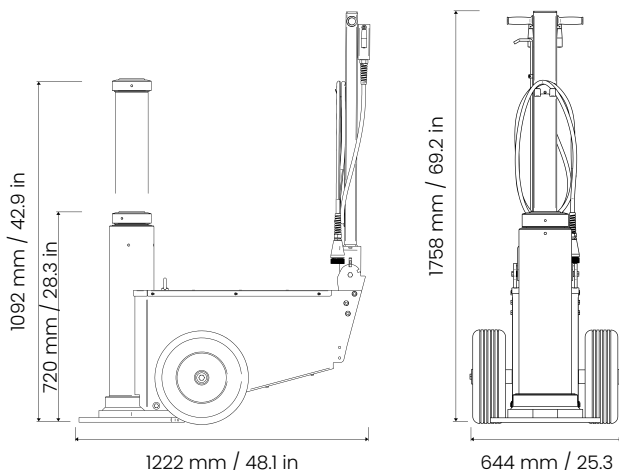

sales@abdexhydraulics.com.au



www.mammut.com.au

M150-90-S2

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M150-90-S2



Capacity: 150 t / 165.3 ton

Net Weight: 377kg / 831 lb

Working Air Pressure: 10-12 bar / 145 - 174 psi

Air Consumption: 600 nl/min

Min. Height: 901 mm / 35.4 in

Max. Height: 1455 mm / 57.2 in

Number of Pistons: 1

Pistons Stroke: 554 mm / 21.8 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control available for extra safety.
- Folding handle.
- Wide range of models and capacities from 60t to 150t.
- Designed for tough Australian conditions.
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks available for mechanical lock and to turn jack into a jack stand

Accessories



M4935

Extension Holder
Right



M4936

Extension Holder
Left



M4930

Extension
200 mm




M4931

Extension
250 mm



M4932

Extension
300 mm




A04495

Tilt Saddle



LBS150

Load block Set
3x M4905, 1xM4906,
1xM4907, 1xM4923

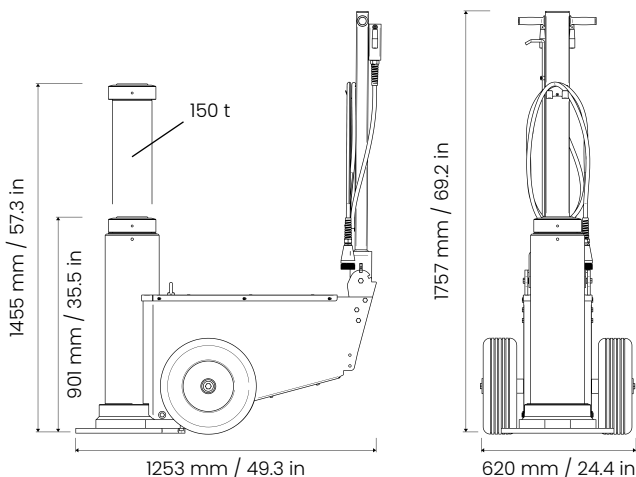

sales@abdexhydraulics.com.au



www.mammut.com.au

M200-65

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M200-65



Capacity:	200 t / 220.4 ton
Net Weight:	385 kg / 848 lb
Working Air Pressure:	10-12 bar / 145 - 174 psi
Air Consumption:	600 nl/min
Min. Height:	650 mm / 25.5 in
Max. Height:	1,000 mm / 39.3 in
Number of Pistons:	1
Pistons Stroke:	350 mm / 13.7 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control as standard for extra safety.
- Folding handle.
- Wide range of models and capacities from 60 t to 200 L
- Designed for tough Australian conditions
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks are available for mechanical lock and to turn jack into a jack stand.

Accessories



M4936

Extension Holder
Left



M4935

Extension Holder
Right



M4930

Extension
200 mm




M4931

Extension
250 mm



M4932

Extension
300 mm




A04495

Tilt Saddle



LBS200-65

Load block Set

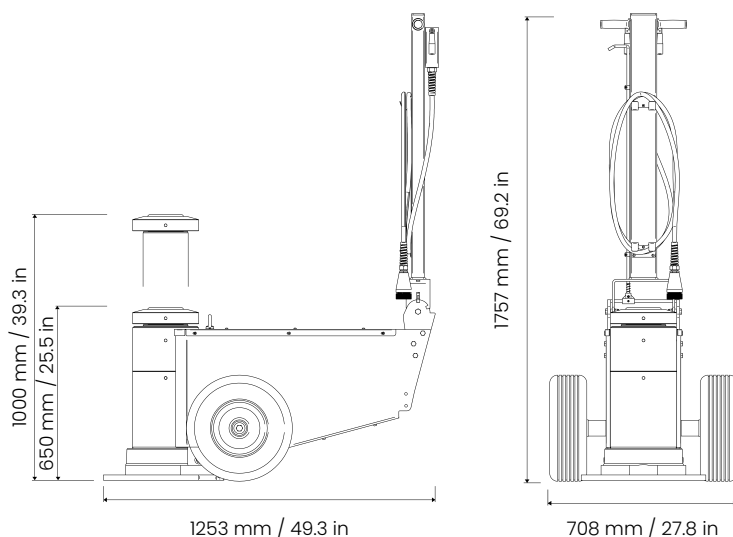

sales@abdexhydraulics.com.au



www.mammut.com.au

M200-90

Mammut Air / Hydraulic heavy vehicle jacks are engineered and manufactured to offer all customers a lifting solution that is reliable, safe and easy to use.

M200-90



Capacity:	200 t / 220.4 ton
Net Weight:	450 kg / 992 lb
Working Air Pressure:	10-12 bar / 145 - 174 psi
Air Consumption:	600 nl/min
Min. Height:	900 mm / 35.4 in
Max. Height:	1,450 mm / 57 in
Number of Pistons:	1
Pistons Stroke:	550 mm / 21.6 in


- Lightweight, quiet, compact and easy to manoeuvre.
- Remote control as standard for extra safety.
- Folding handle.
- Wide range of models and capacities from 60 t to 200 L
- Designed for tough Australian conditions
- Pneumatic tyres for easy operation.
- Internal check valves to prevent unintentional descent.
- Load blocks are available for mechanical lock and to turn jack into a jack stand.

Accessories



M4935

Extension Holder
Right



M4936

Extension Holder
Left



M4930

Extension
200 mm




M4931

Extension
250 mm



M4932

Extension
300 mm





A04495

Tilt Saddle



LBS200-90

Load block set

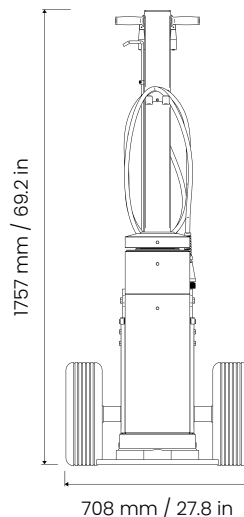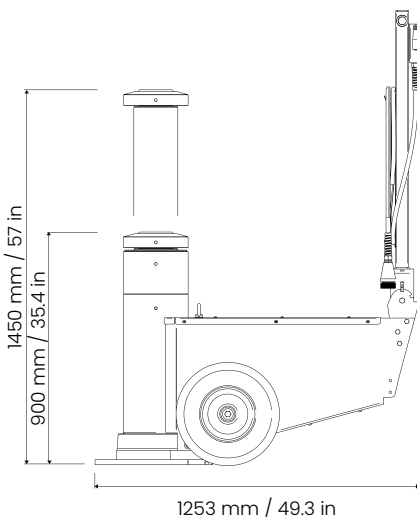

sales@abdexhydraulics.com.au



www.mammut.com.au


MXA 50-100-ASNZ

Light, powerful, pneumatic assisted operation with minimal effort. This jack stand can sustain up to 50 metric tons of weight (AS-NZ standard compliant). The pneumatic adjustment of the jack stand height is fast and extremely efficient. Compressed air (4-12 bar range) is required.

MXA 50-100-ASNZ



Capacity:	50 t / 55.1 ton
Net Weight:	115 kg / 253 lb
Min Height:	600 mm / 23.6 in
Max Height:	1,000 mm / 39.3 in
Positions:	5
Air Requirement:	4-12 bar (58-174 psi)

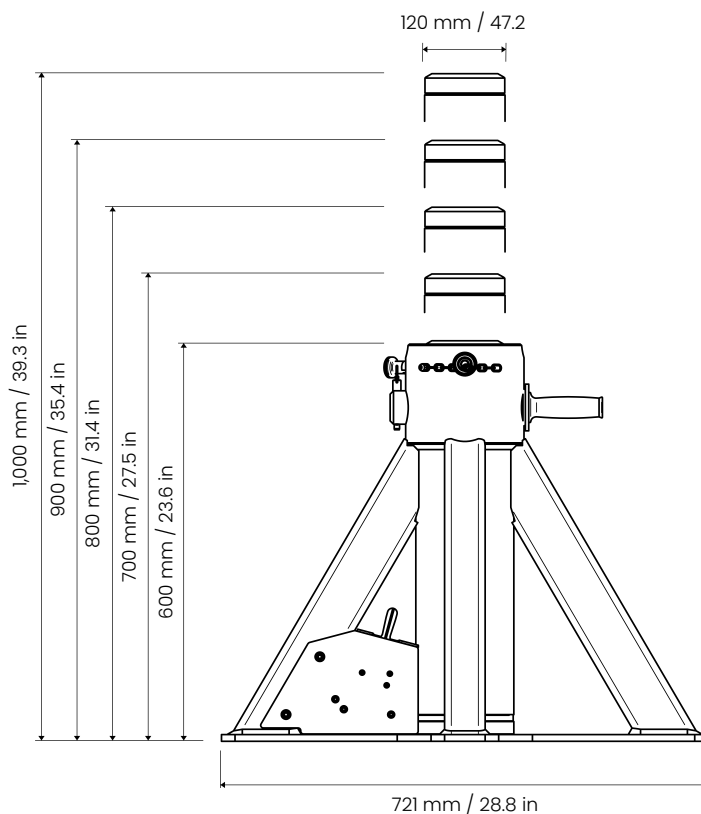


MXA 100-115-ASNZ

Light, powerful, pneumatic assisted operation with minimal effort. This jack stand can hold up to 100 metric tons of load (AS-NZ standard compliant). The pneumatic adjustment of the jack stand height is fast and easy to operate. Compressed air (4-12 bar range) is required.

MXA 100-115-ASNZ



Capacity:	100 t / 110 ton
Min Height:	700 mm / 27.5 in
Max Height:	1,150 mm / 54.3 in
Positions:	5
Air Requirement:	4-12 bar (58-174 psi)

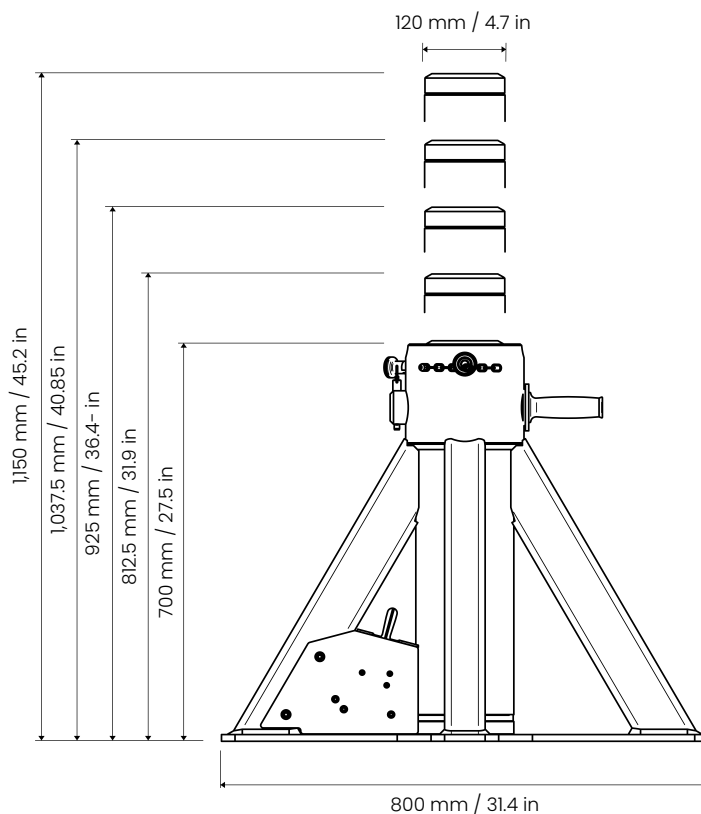

sales@abdexhydraulics.com.au



www.mammut.com.au


MXM 20-120-ASNZ

Light, powerful, and easily adjustable. This jack stand is perfect to sustain up to 20 metric tons (AS-NZ standard compliant) after the lifting operation. It allows you to work safely and efficiently. The jack stand can be easily adjusted without air or electric power in six height positions.

MXM 20-120-ASNZ



Capacity:	20 t / 22 ton
Net Weight:	50 kg / 110 lb
Min Height:	700 mm / 27.5 in
Max Height:	1,200 mm / 47.2 in
Positions:	6
Air Requirement:	None

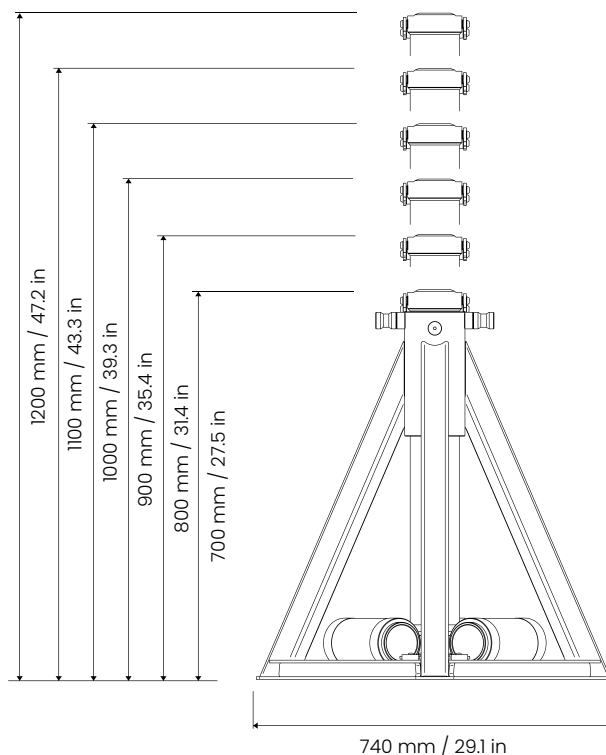

A06229-A06230

The lightest, most agile and most compact jack stands trolley on the market. Optional trolley, allow a single operator to quickly move the jack stand as needed. Provided with pneumatic wheels, suitable for uneven ground. The handle is adjustable in three positions in order to pick and move the jack stand at different height regulations.



A06229

Trolley For MXM-40-120 and
MXM-20-120-ASNZ


A	691 mm / 27.2"
B	1,158 mm / 45.5"
C	1,662 mm / 65.4"
D	283 mm / 11.1"
E	842 mm / 33.1"
F	1,496 mm / 58.8"
G	418 mm / 16.4"
Weight:	22 kg / 48 lb



A06230

Trolley For MXA-75-100 and
MXA-50-100-ASNZ

A:	635 mm / 25"
B:	1,204 mm / 47.4"
C:	1,631 mm / 64.2"
D:	142 mm / 5.5"
E:	697 mm / 27.4"
F:	1,405 mm / 55.3"
G:	418 mm / 16.4"
Weight:	21 kg / 46 lb

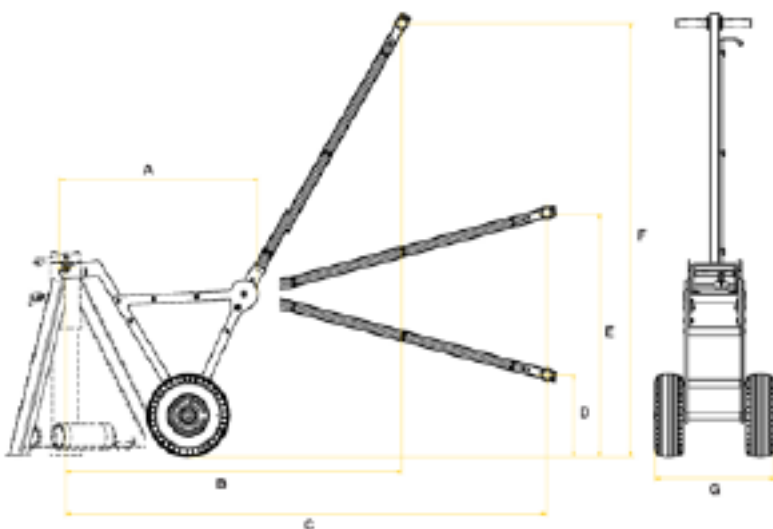

Jacking Pads

Code	Capacity With Mammut Jacks	Maximum Overall Capacity	Size	Weight
M-SP0300180-01	180 t / 198 ton	180 t / 198 ton	300 x 300 x 30 mm 11.8 x 11.8 x 1.1 in	2.5 kg 5.5 lb
M-SP0300320-01	200 t / 220 ton	320 t / 352 ton	400 x 400 x 30 mm 15.7 x 15.7 x 1.1 in	4.5 kg 9.9 lb
M-SP040010-01	200 t / 220 ton	320 t / 352 ton	400 x 400 x 40 mm 15.7 x 15.7 x 1.5 in	6 kg 13.2 lb
M-SP060015-01	200 t / 220 ton	320 t / 352 ton	400 x 400 x 60 mm 15.7 x 15.7 x 2.3 in	9 kg 19.8 lb
M-SP080020-01	200 t / 220 ton	320 t / 352 ton	400 x 400 x 80 mm 15.7 x 15.7 x 3.1 in	12 kg 26.4 lb
M-SP0400040-01	200 t / 220 ton	500 t / 551 ton	500 x 500 x 40 mm 19.6 x 19.6 x 1.5 in	9 kg 19.8 lb
M-SP050050-01	200 t / 220 ton	500 t / 551 ton	500 x 500 x 50 mm 19.6 x 19.6 x 1.9 in	12 kg 26.4 lb
M-SP060020-01	200 t / 220 ton	615 t / 677 ton	550 x 550 x 60 mm 19.6 x 19.6 x 2.3 in	17 kg 37.4 lb
M-SP040020-01	200 t / 220 ton	720 t / 793 ton	600 x 600 x 40 mm 23.6 x 23.6 x 1.5 in	14 kg 30.8 lb
M-SP0500720-01	200 t / 220 ton	720 t / 793 ton	600 x 600 x 50 mm 23.6 x 23.6 x 1.9 in	17 kg 37.4 lb
M-SP060025-01	200 t / 220 ton	720 t / 793 ton	600 x 600 x 60 mm 23.6 x 23.6 x 2.3 in	20 kg 44 lb
M-SP040025-01 with ramp	200 t / 220 ton	1220 t / 1344 ton	600 x 1000 x 40 mm 23.6 x 39.3 x 1.5 in	23 kg 50.7 lb
M-SP060035-01	200 t / 220 ton	1300 t / 1433 ton	800 x 800 x 60 mm 31.4 x 31.4 x 2.3 in	37 kg 81.5 lb
M-SP0602000-01	200 t / 220 ton	2000 t / 2204 ton	1000 x 1000 x 60 mm 39.3 x 39.3 x 2.3 in	58 kg 127.8 lb
M-SP0802000-01	200 t / 220 ton	2000 t / 2204 ton	1000 x 1000 x 80 mm 39.3 x 39.3 x 3.1 in	78 kg 171.9 lb
M-RP060040-01	200 t / 220 ton	1570 t / 1730 ton	1000 x 60 mm 39.3 x 2.3 in	46 kg 101.4 lb




M-SP040025-01

*The maximum load is calculated under conditions of uniform load distribution over the entire surface, and the pad placed on a flat, smooth surface with a compressive strength greater than 20 N / mm² (e.g. concrete).

Stack Pads

Code	Max Capacity	Size	Weight
M-STP805	25 t / 28 ton	500 x 250 x 80 mm 19.6 x 9.8 x 3.1 in	10 kg 22 lb
M-SP8010	25 t / 28 ton	1000 x 250 x 80 mm 39.3 x 9.7 x 3.1 in	4.5 kg 9.9 lb

Stack pads are often used in combination with other pads. Stack several pads allows to reach the requested height which would not be reachable with a normal outrigger pad. This will result in constructions of 2-3 levels to reach the desired height. Stack pads have a standard 2-sided anti-slip finishing.



Stability Blocks

Code	Max Compression	Size	Weight
M-SBB0060	3 N/mm ²	448 x 140 x 140 mm 17.6 x 5.5 x 5.5 in	8 kg 17.6 lb
M-SBB061	3 N/mm ²	1174 x 140 x 140 mm 46.2 x 5.5 x 5.5 in	17 kg 37.4 lb




Some examples of possible structures:

3+2 Max Load: 20t

3+3 Max Load: 45t

8+6 Max Load: 180t

8+8 Max Load: 320t




Suggestions:

- Always set up a full layer at the base.
- Use our top/bottom pads in order to have a better weight distribution.

Top / Bottom Pads

Code	Size	Weight
M-SBB0040	1200 x 1200 x 80 mm 47.2 x 47.2 x 3.1 in	10 kg 22 lb
M-SBB0050	25 t / 28 ton	12 kg 26.4 lb



Wedge Pads

Code	Size	Weight
M-SBB0030	400 x 120 x 120 mm 15.7 x 4.7 x 4.7 in	3 kg 6.6 lb



The maximum load is calculated under conditions of uniform load distribution on the entire surface with the pad placed on the flat, smooth surface with a compressive strength greater than 20 N/mm² (e.g. concrete).

